




superior performance when formulated in Group II, III and IV formulations. Typical treat levels may range between 0.05% and 1.0%. Naugalube® 750 can also be used in conjunction with other Naugalube® antioxidants such as alkylated hindered phenolics.

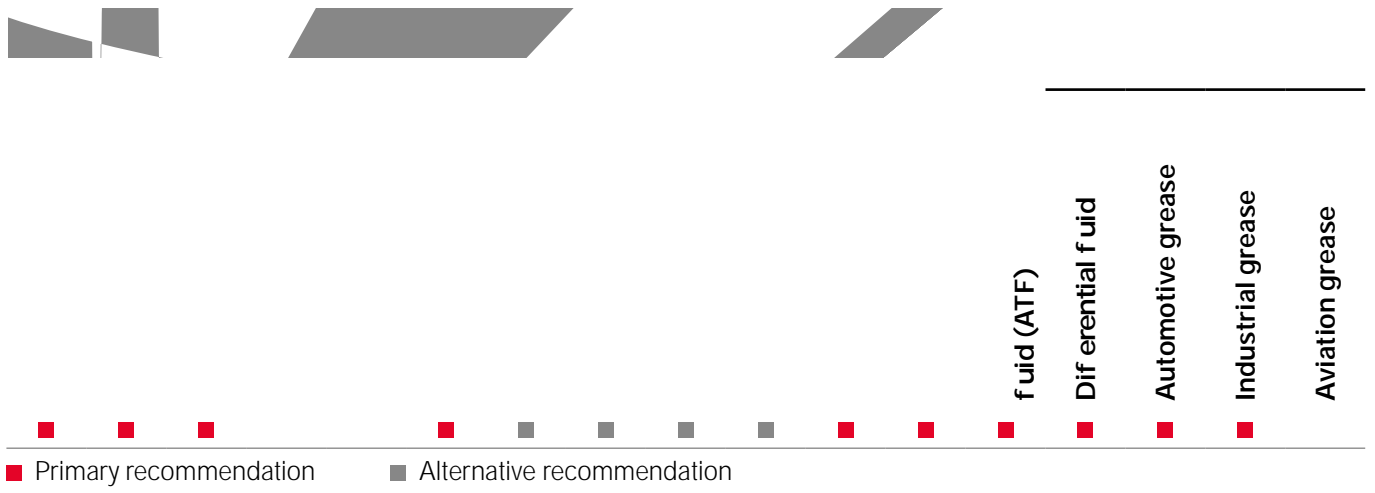

ASTM D3850

LANXESS
Energizing Chemistry

LANXESS Deutschland GmbH
Business Unit Lubricant Additives

50569 Cologne, Germany

Customers in the USA are kindly
requested to refer to:

LANXESS Corporation
Business Unit Additives
2 Armstrong Road
Shelton, CT 06484, USA
Tel: +1-203-573-2000

lubricant.additives@lanxess.com

This information and our technical advice – whether verbal, in writing or by way of trials – is subject to change without notice and given in good faith but without warranty or guarantee, express or implied, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to verify the information currently provided – especially that contained in our safety data and technical information sheets – and to test our products as to their suitability for the intended processes and uses. The application, use and processing of our products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with the current version of our General Conditions of Sale and Delivery.

refer exclusively to the specimens tested. Under certain conditions, the test results established can be affected to a considerable extent by the processing conditions and manufacturing process.

©2020 LANXESS.
Naugalube®

All trademarks are registered in many countries in the world.